





CUMMINS ENGINE SPECIFICATION

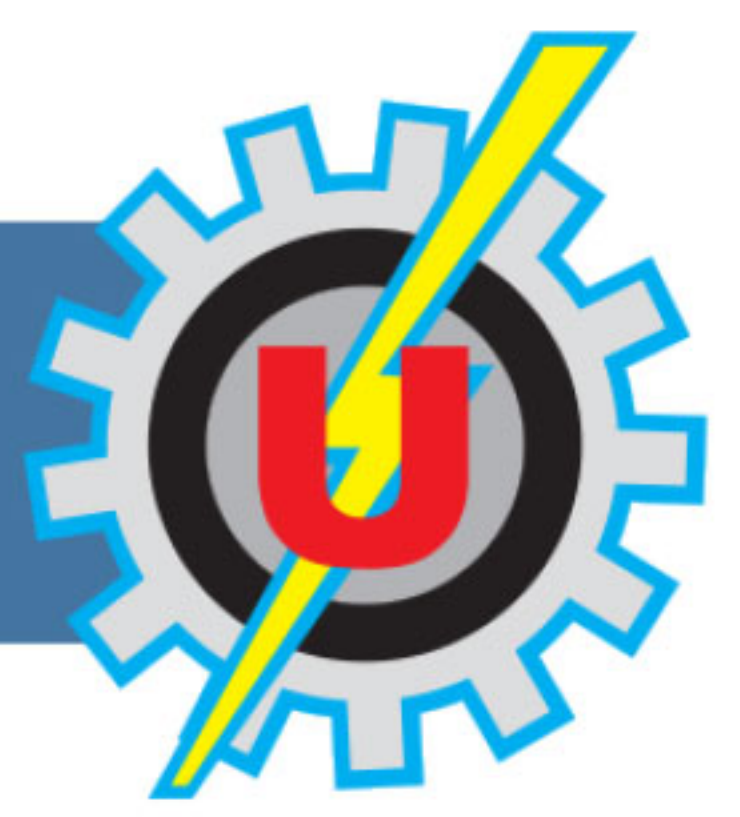

STAMFORD
power generation

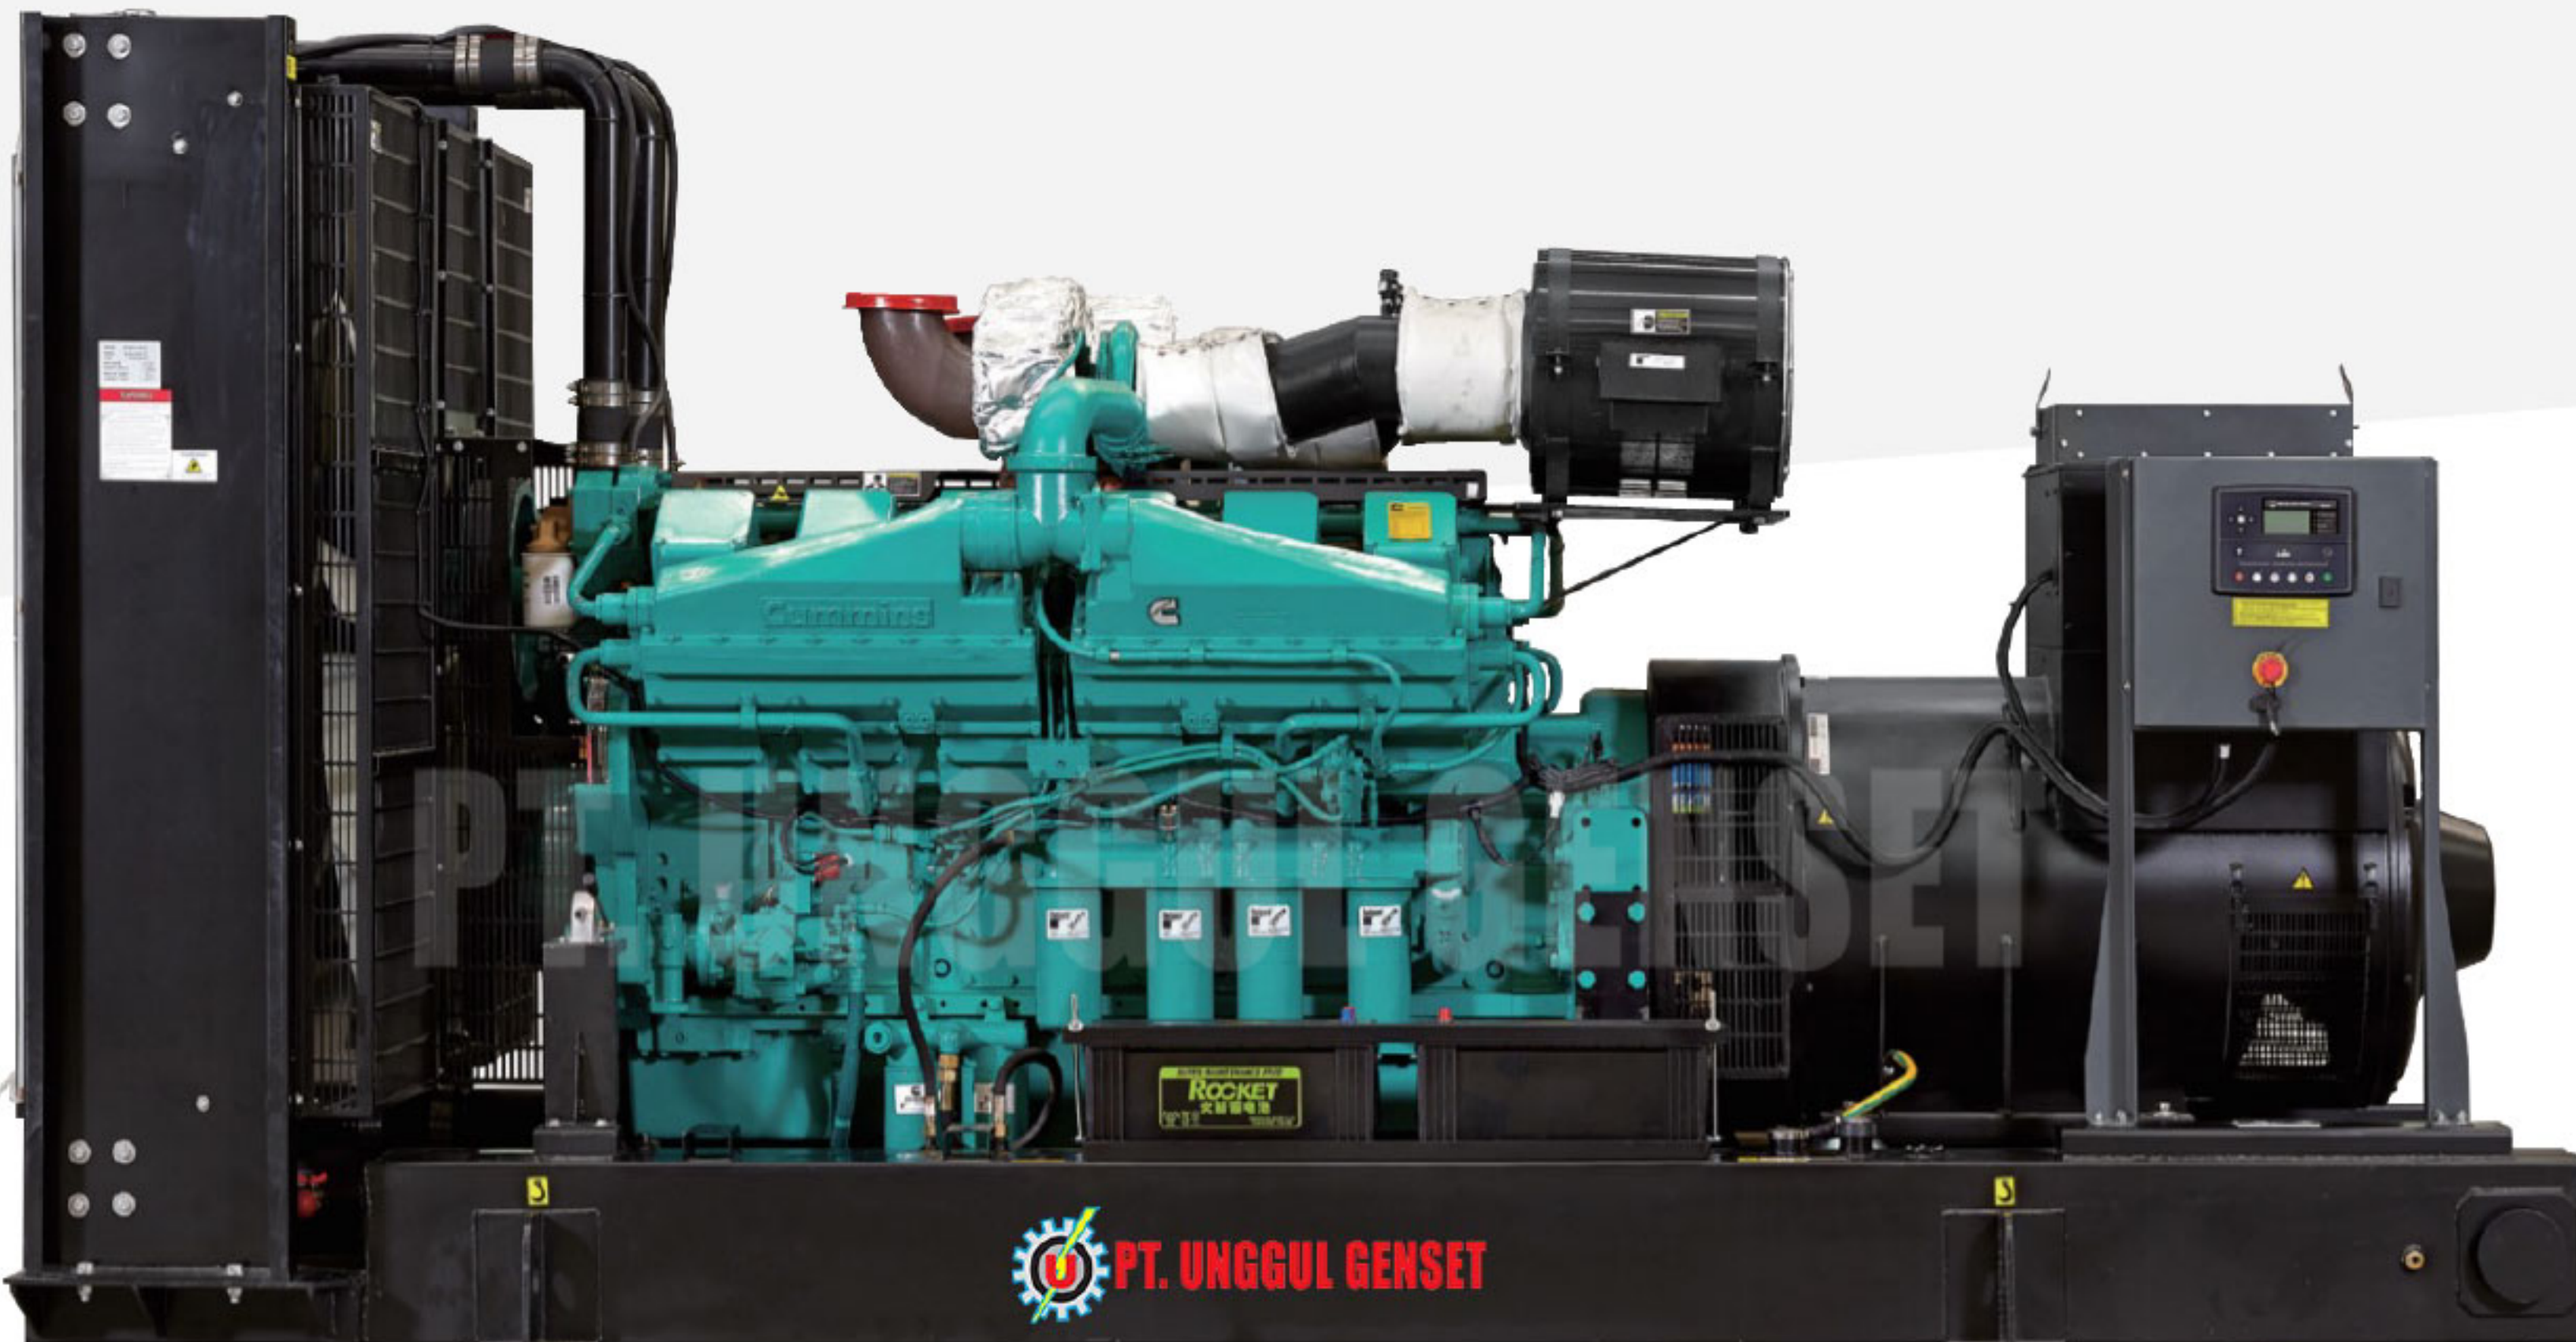

*Bentuk, warna dan spesifikasi dapat berubah sewaktu waktu tanpa pemberitahuan terdahulu

MODEL	Output Power		CUMMINS ENGINE	No. Of Cylinder	Bore x Stroke (mm)	Total Displacement (L)	Engine output at max		Fuel Consumption		Fuel Tank Capacity	Total Oil Lubricating Capacity (L)	Coolant capacity (engine only) (L)	Approx dimensions and weight			
	PRIME KVA	STANBY KVA					kWm	HP	75% Load	100% Load				Open Type		Silent Type	
														LXWXH (m)	Weight (Kg)	LXWXH (m)	Weight (Kg)
30C	27,5	30	4B3.9-G1	4	102 x 120	3,9	27	36	5,2	6,7	Minimum 5 hours operation	10,9	7,2	1,86 x 0,95 x 1,44	788	2,55 x 0,98 x 1,60	1093
44C	40	44	4BT3.9-G2	4	102 x 120	3,9	40	54	7,3	9,3		10,9	7,2	1,86 x 0,95 x 1,44	814	2,35 x 0,98 x 1,6	1179
66C	60	66	4BTA3.9-G2	4	102 x 120	3,9	55	74	9,8	13,1		10,9	7,9	1,88 x 0,95 x 1,44	968	2,55 x 0,98 x 1,60	1410
110C	100	110	6BT5.9-G2	6	102 x 120	5,9	92	123	17	22		16,4	9,9	2,18 x 1 x 1,47	1265	3,16 x 1,11 x 1,71	1700
150C	135	150	6BTAA5.9-G2	6	102 x 120	5,9	130	174	23	30		16,4	9,9	2,33 x 1 x 1,47	1370	3,31 x 1,11 x 1,76	1984
165C	150	165	6BTAA5.9-G12	6	102 x 120	5,9	155	207	26	34		16,4	10	2,36 x 1 x 1,5	1420	3,4 x 1,15 x 1,77	2110
200C	180	200	6CTA8.3-G2	6	114 x 135	8,3	180	241	30	40		23,8	12,3	2,4 x 1,1 x 1,65	1782	3,4 x 1,25 x 1,95	2660
220C	200	220	6CTAA8.3-G2	6	114 x 135	8,3	203	272	34	45,4		23,8	12,3	2,5 x 1,12 x 1,68	1865	3,72 x 1,31 x 2,02	2545
275C	250	275	6LTAA8.9-G2	6	114 x 145	8,9	240	322	39	53		27,6	11,1	2,57 x 1,13 x 1,68	1968	3,72 x 1,36 x 2,02	2777
275C	250	275	NT855-GA	6	140 x 152	14	254	340	-	53		38,6	20,8	3,02 x 1,3 x 1,94	2800	4,37 x 1,44 x 2,14	3400
330C	300	330	NTA855-G1A	6	140 x 152	14	291	390	-	61		38,6	20,8	3,02 x 1,3 x 1,94	3025	4,37 x 1,44 x 2,14	3630
350C	316	350	NTA855-G1B	6	140 x 152	14	321	430	-	68		38,6	20,8	3,02 x 1,3 x 1,94	3110	4,37 x 1,44 x 2,14	3720
385C	350	385	NTA855-G2A	6	140 x 152	14	343	460	-	72		38,6	20,8	3,02 x 1,3 x 1,94	3210	4,37 x 1,44 x 2,14	3840
385C	350	385	NTA855-G4	6	140 x 152	14	351	470	-	75		38,6	20,8	3,02 x 1,3 x 1,94	3280	4,38 x 1,44 x 2,14	3930
550C	500	550	KTA19-G4	6	159 x 159	18,9	504	675	82	107		50	30	3,38 x 1,48 x 2	3995	4,86 x 1,73 x 2,46	5300
550C	500	550	QSX15-G8	6	137 x 169	15	500	670	78,7	103		91	42	3,4 x 1,42 x 2,12	3950	4,86 x 1,73 x 2,48	5285
660C	600	660	KTA19-G8	6	159 x 159	18,9	575	771	101	137		50	30	3,44 x 1,48 x 2	4175	4,96 x 1,83 x 2,48	5578
700C	630	700	KTAA19-G6A	6	159 x 159	18,9	610	818	95,2	127,8		50	30	3,57 x 1,74 x 2,07	4510	5,1 x 1,92 x 2,48	6300
825C	750	825	KTA38-G2	12	159 x 159	37,8	731	980	128	167	-	135	118	4,28 x 1,93 x 2,39	7000	5,81 x 2,27 x 2,55	9000
825C	750	825	VTA28-G6	12	140 x 152	28	722	968	133	180	-	83	80	4,07 x 1,75 x 2,16	6000	5,81 x 2,27 x 2,55	8000
880C	800	880	KTA38-G2B	12	159 x 159	37,8	789	1057	-	167,3	-	114	118	4,34 x 1,93 x 2,4	7264	5,81 x 2,27 x 2,55	9264
880C	800	880	QSK23-G3	6	170 x 170	23,15	768	1030	121	161	-	103	46,5	4,12 x 1,87 x 2,26	6200	5,81 x 2,27 x 2,55	8200
1000C	910	1000	KTA38-G2A	12	159 x 159	37,8	895	1200	147	191	-	114	118	4,29 x 1,93 x 2,39	7295	5,81 x 2,27 x 2,55	9345
1100C	1000	1100	KTA38-G5	12	159 x 159	37,8	970	1300	161	209	-	135	124	4,29 x 1,93 x 2,39	7455	5,81 x 2,27 x 2,55	9580
1100C	1000	1100	QST30-G4	12	140 x 165	30,5	970	1300	151	202	-	154	192	4,25 x 1,95 x 2,22	7100	5,81 x 2,27 x 2,55	9225
1400C	1250	1400	KTA50-G3	16	159 x 159	50,3	1227	1645	199	261	-	177	161	4,96 x 1,97 x 2,28	9445	6,06 x 2,44 x 2,59	15645
1650C	1500	1650	KTA50-GS8	16	159 x 159	50,3	1429	1915	238	309	-	204	165	5,39 x 2,18 x 2,53	10450	12,19 x 2,44 x 2,9	18450
1900C	1700	1900	QSK60-G10	16	159 x 190	60,2	1630	2185	261	342	-	280	535	-	-	-	-
2000C	1875	2000	QSK60-G3	16	159 x 190	60,2	1790	2399	276	371	-	280	490	5,9 x 2,18 x 2,6	-	12,19 x 2,44 x 2,9	-
2250C	2050	2250	QSK60-G4	16	159 x 190	60,2	1915	2567	291	394	-	280	490	6,07 x 2,27 x 2,54	14200	12,19 x 2,44 x 2,9	23100